


FARMI[®] FOREST



K250



.....
Felling Head for Forest Cranes

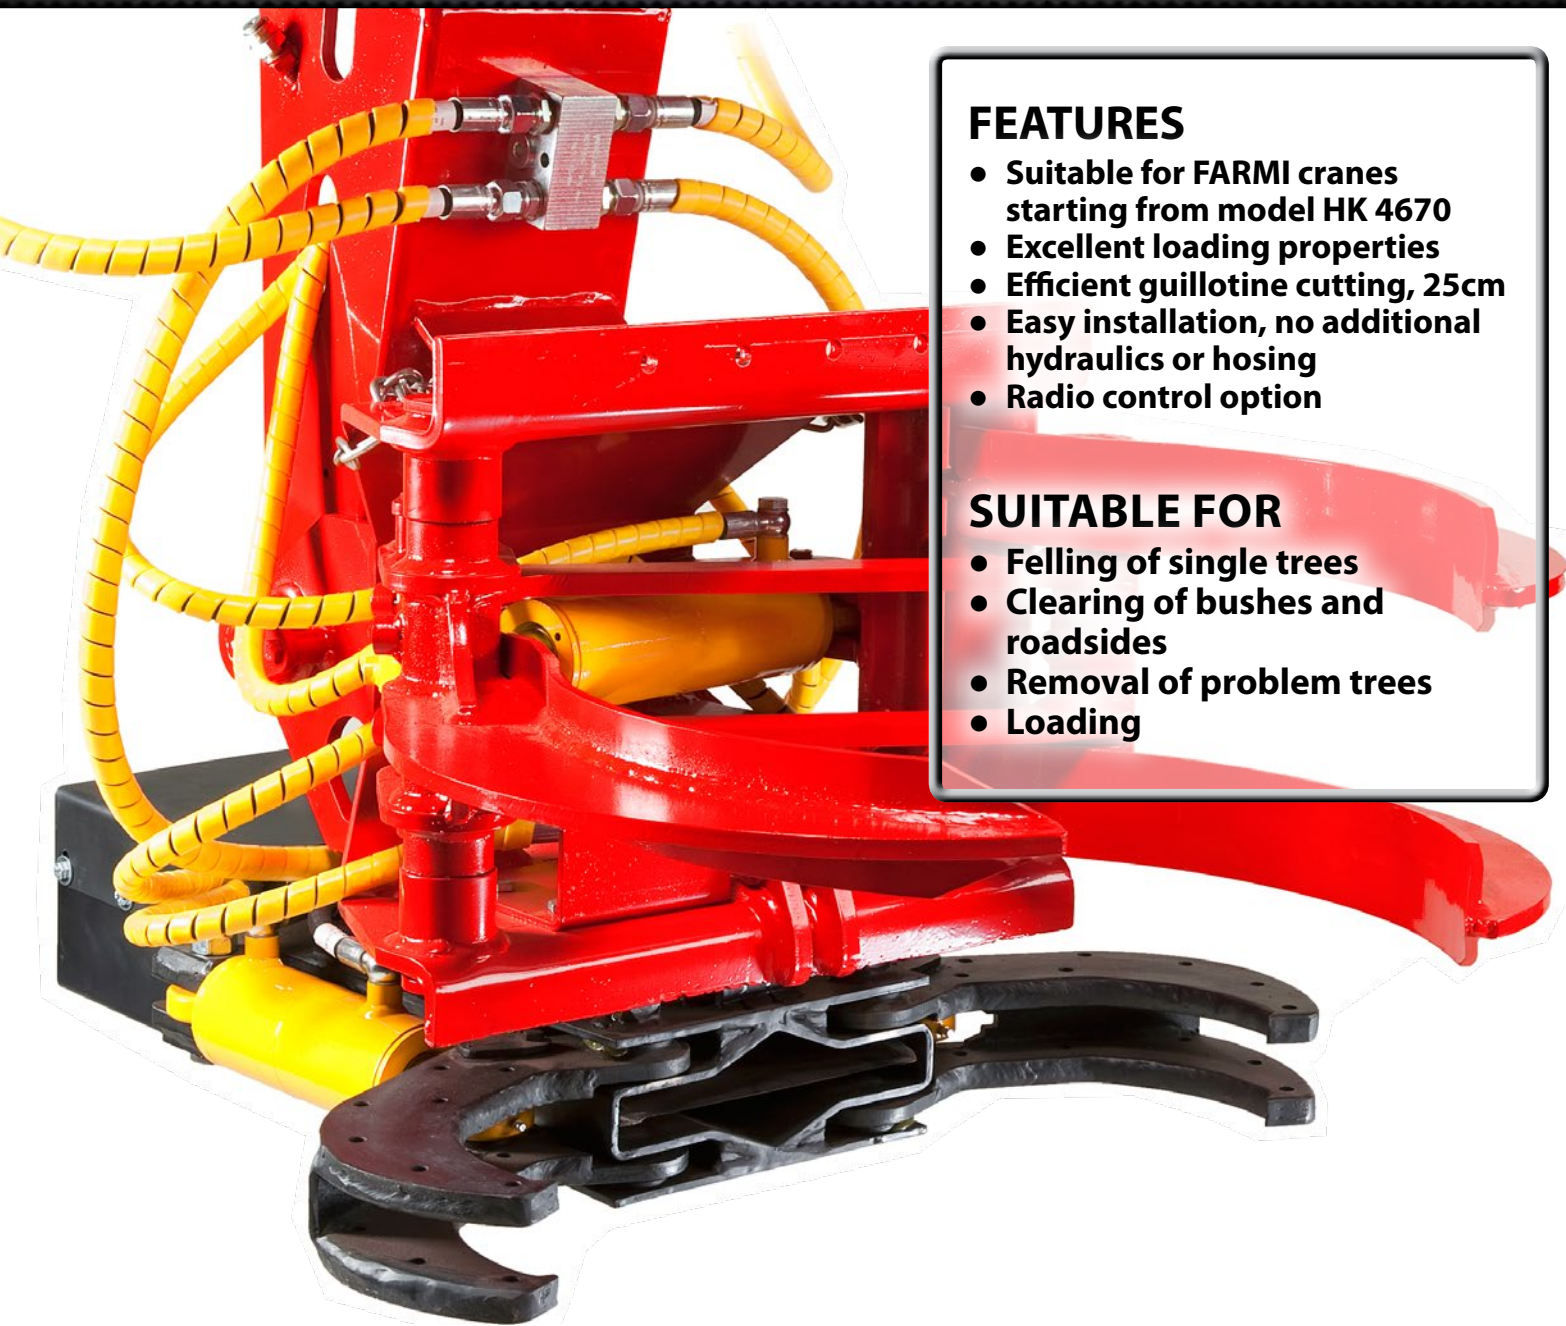

FEATURES

- Suitable for FARMIFOREST cranes starting from model HK 4670
- Excellent loading properties
- Efficient guillotine cutting, 25cm
- Easy installation, no additional hydraulics or hosing
- Radio control option

SUITABLE FOR

- Felling of single trees
- Clearing of bushes and roadsides
- Removal of problem trees
- Loading

Effortless felling and loading

FARMI K250 is easy to install for example in the place of forwarders own loading grapple and to be used for felling, collecting, cutting and loading of trees, bushes and branches.

A versatile auxiliary device for truck loader cranes: Trees and bushes that have been cut down can be lifted onto the bed of a truck directly, which makes harvesting safe and efficient in areas of restricted access. Thanks to the long extension capacity of the loader crane, all trees can be cut into sections from the top down, regardless of their height.




- Removing problem trees in urban areas and residential plots
- Removing hedges, old poles, and posts
- Shortening branches
- Cutting and lifting of trees fallen on power lines, roads, and buildings

STRONG GUILLOTINE

MAXIMUM CUTTING POWER


- Traditional FARMI-guillotine
- A clean and even cutting surface
- A two-phase cutting
 1. Grippers close around the tree
 2. Cutting cylinder pushes the blade through the tree
- Max. cutting Ø 25 cm

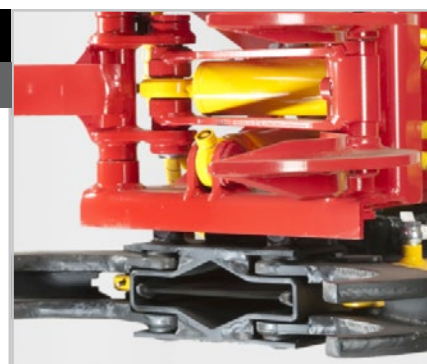

FAST GUILLOTINE

MAXIMUM CUTTING SPEED

- New innovative FARMI-guillotine
- A clean and even cutting surface
- Cuts with one stroke
 1. Grippers close around the tree and force the blade through the wood
- Max. cutting Ø 28 cm

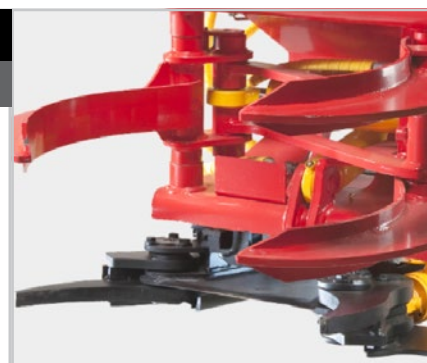

ACCESSORIES

- Radio control with various transmitter options
- Extension boom for 5-8 ton excavators, 1 meter reach. S40 or S45 quick couplings
- Cejn Flat-face quick coupling
- Rotator FR10 / FR15 / FR21
- Link for the rotator
- Spare part packages

TECHNICAL SPECIFICATIONS

FARMI K250

Weight without a rotator	300 kg
Height in felling position	90 cm
Grapple opening	90 cm
Cutting diameter, power, and speed	Ø 25 cm / 95 kN / 1.8 s
Required hydraulic pressure	170-200 bar
Required oil flow	40-90 l/min
Warranty	12 months or 1000 hours
Control system	Cable control with 3 buttons
Voltage	12V or 24V